




iiyama

THE ABC OF IIYAMA - how to find your ProLite?

Panel type? Resolution? Stand type? - our model names will tell you all of that and more about the basic specification of each product. Below you will find a practical guide explaining how to read them.

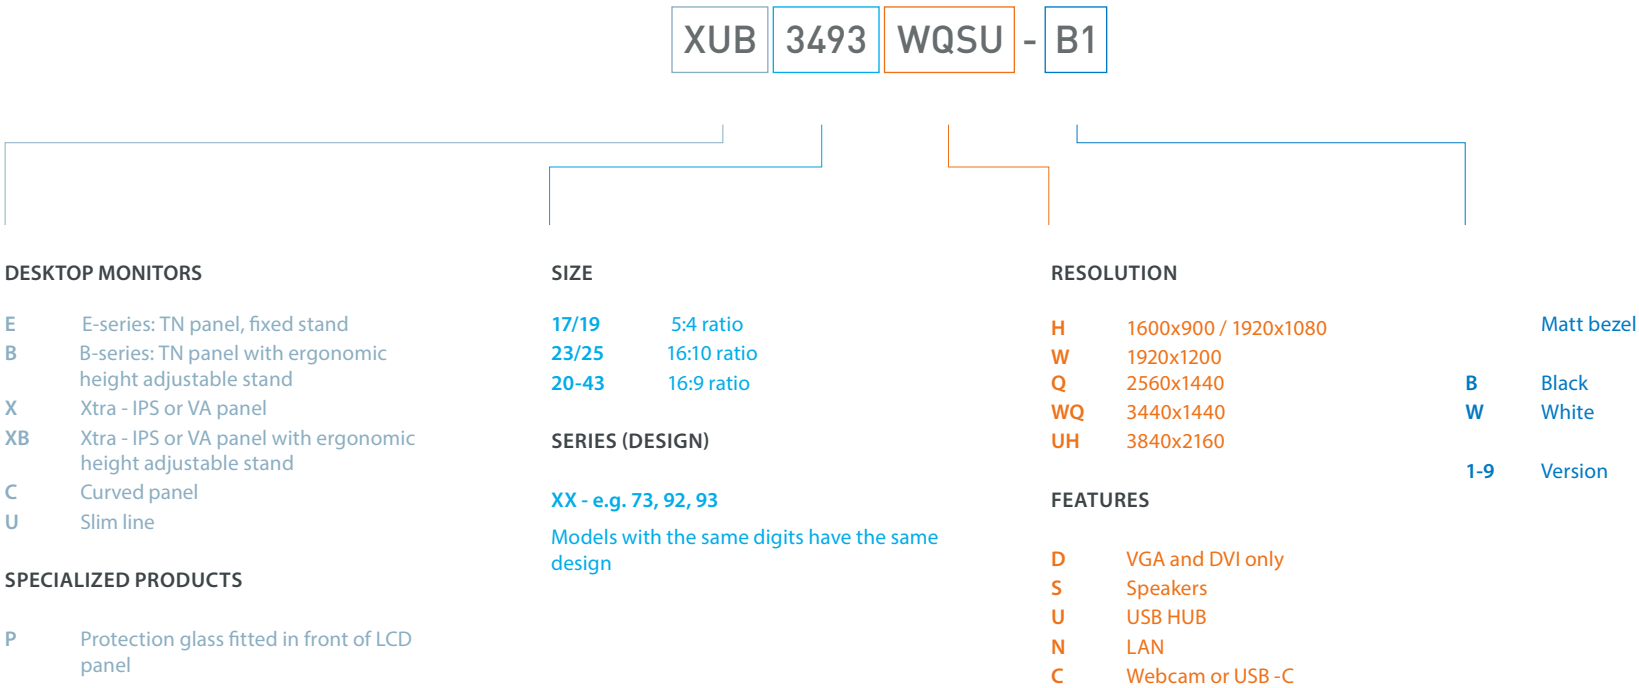

INDEX

THE IIYAMA ABC
02

DESKTOP MONITORS
04-15

E-SERIES	E1780SD-B1 · E1980D-B1 · E2083HSD-B1 · E2791HSU-B1
B-SERIES	B1780SD-B1/W1 · B1980D-B1/W1 · B2083HSD-B1 · B2791HSU-B1 · B2791QSU-B1
X-SERIES	XU/XUB2292HS-B1 · XU2294HSU-B1 · XUB2294HSU-B1/W1 · XU/XUB2390HS-B1 · XUB2395WSU-B1 X/XB2481HS-B1 · X/XB2483HSU-B3 · XUB2490HSUC-B1 · XUB2492HSU-B1/W1 · XUB2492HSN-B1 XU/XUB2493HS-B4 · XU/XUB2493HSU-B1 · XUB2493QSU-B1 · XUB2495WSU-B3 · XUB2496HSU-B1 XUB2595WSU-B1 · XU2792HSU-B1 · XUB2792HSU- B1/W1 · XUB2792HSC-B1 · XUB2792HSN-B1 XU2792QSU-B1 · XUB2792QSU-B1/W1 · XUB2792QSN-B1 · XU/XUB2792UHSU-B1 · XU/XUB2793HS-B4 · XU/XUB2793HSU-B4 XUB2796HSU-B1 · XUB2796QSU-B1 · XUB2893UHSU-B1 · XB3270QS-B1 · XB3288UHSU-B1 X3291HS-B1 · XUB3293UHNS-B1 · XUB3493WQSU-B1 · XCB3494WQS-B1 · X4373UHSU-B1

UNIFIED COMMUNICATION
16

FEATURES EXPLANATION
17

QUICK GUIDE TO DIFFERENT SERIES
18

SCREEN RESOLUTION / LEGEND
19

ABOUT IIYAMA
20

E-SERIES MONITORS

The E-series monitors, providing great value for money, are the perfect choice for home users. The monitors are fitted with the latest high quality LED backlit TN panels offering very good image quality combined with low power consumption. As TN panels guarantee extremely fast response time, the E-series monitors are most suitable for watching videos and even playing games.

TN panel

TN is the most common LCD technology. TN panels offer fast response time, good overall performance and attractive price-point. In combination with LED backlight, TN technology guarantees high brightness and low power consumption.

ACR (Advanced Contrast Ratio)

Contrast Ratio is a measurement of the difference between the darkest black and the brightest white your monitor can display. Advanced Contrast Ratio is a feature that automatically adjusts contrast and brightness of the screen to assure perfect picture quality while watching films and playing games.

VESA

VESA mount compliance allows you to organise your desk work space by utilising a space saving stand or monitor arm. The easy to set-up iiyama stands and arms offer broad adjustment capabilities, including tilt, swivel, height and rotation, so you can easily adjust the position of the screens to your preferences assuring comfortable, healthy and ergonomic body posture.



For more information, please scan the QR code:





ProLite E1780SD-B1



ProLite E1980D-B1



ProLite E2083HSD-B1



ProLite E2791HSU-B1

Display characteristics				
Panel	TN	TN	TN	TN
Size category	17" (43 cm)	19" (48 cm)	19.5" (49.4 cm)	27" 6(8.6 cm)
Native resolution	1280 x 1024	1280 x 1024	1600 x 900	1920 x 1080
Response time (ms)	5	5	5	1
Contrast typical	1000:1	1000:1	1000:1	1000:1
Contrast advanced (ACR)	12 000 000:1	12 000 000:1	12 000 000:1	80 000 000:1
Brightness typical (cd / m ²)	250	250	250	300
Viewing angle (horizontal / vertical)	170° / 160°	170° / 160°	170° / 160°	170° / 160°
Display colour (mln)	16.7	16.7	16.7	16.7
Interfaces & connectors				
Input connector	VGA, DVI	VGA, DVI	VGA, DVI	VGA, HDMI, DP
USB HUB	-	-	-	2 outputs (v.2.0)
Sound				
Speakers / Headphone socket	2 x 1W / -	- / -	2 x 1W / yes	2 x 2W / yes
Physical specifications				
Dimensions w x h x d (mm)	370 x 379.5 x 178	411 x 402 x 204.5	469.5 x 360 x 203	613.5 x 440.5 x 197
Weight (kg)	2.6	3.2	2.7	5.3
Cables included	power, DVI, audio	power, DVI	power, DVI, audio	power, USB, HDMI
Power management / Regulations				
Power usage typical (W)	14	16	15	19
Power usage max. in Power Management Mode (W)	0.5	0.5	0.5	0.5
Power management	VESA DPMS	VESA DPMS, ENERGY STAR®	VESA DPMS	VESA DPMS, ENERGY STAR®
Regulations	CE, TÜV-Bauart, VCCI-B	CE, TÜV-GS, UKCA	CE, TÜV-GS, VCCI-B, EAC, TCO	CE, TÜV-GS, EAC
Design				
Colour, bezel finish, extra	black; matt	black; matt	black; matt	black; matt

B-SERIES MONITORS

iiyama B-series monitors come equipped with a number of features to help you create a workspace that best fits your needs. The stand of the monitor is height adjustable ensuring perfect posture and optimal viewing which makes it ideal for long term usage. The B-series guarantees high performance, ergonomic design and power efficiency taking your professional experience to the next level and helping reduce the total cost of ownership.

HAS


A Height Adjustable Stand allows you to set the perfect position of the screen ensuring ergonomic posture and optimal viewing comfort which benefits not only your health but also productivity.


PIVOT

Screen rotation means you can change the position of the screen from landscape into portrait. This feature can be handy whilst working with long spreadsheets or texts.


EcoVadis business sustainability ratings

The EcoVadis sustainability rating is the best known and recognised assessment of sustainable business in the world. At iiyama we care to improve economies, people's lives and the planet we all depend on. Sustainability intelligence influences every business decision we make, starting with environment, labor and human rights, ethics and finally, sustainable procurement. The EcoVadis silver medal awarded to iiyama confirms the compatibility of our activity with international sustainability standards and Sustainability/ CSR principles integration into our business and management system.

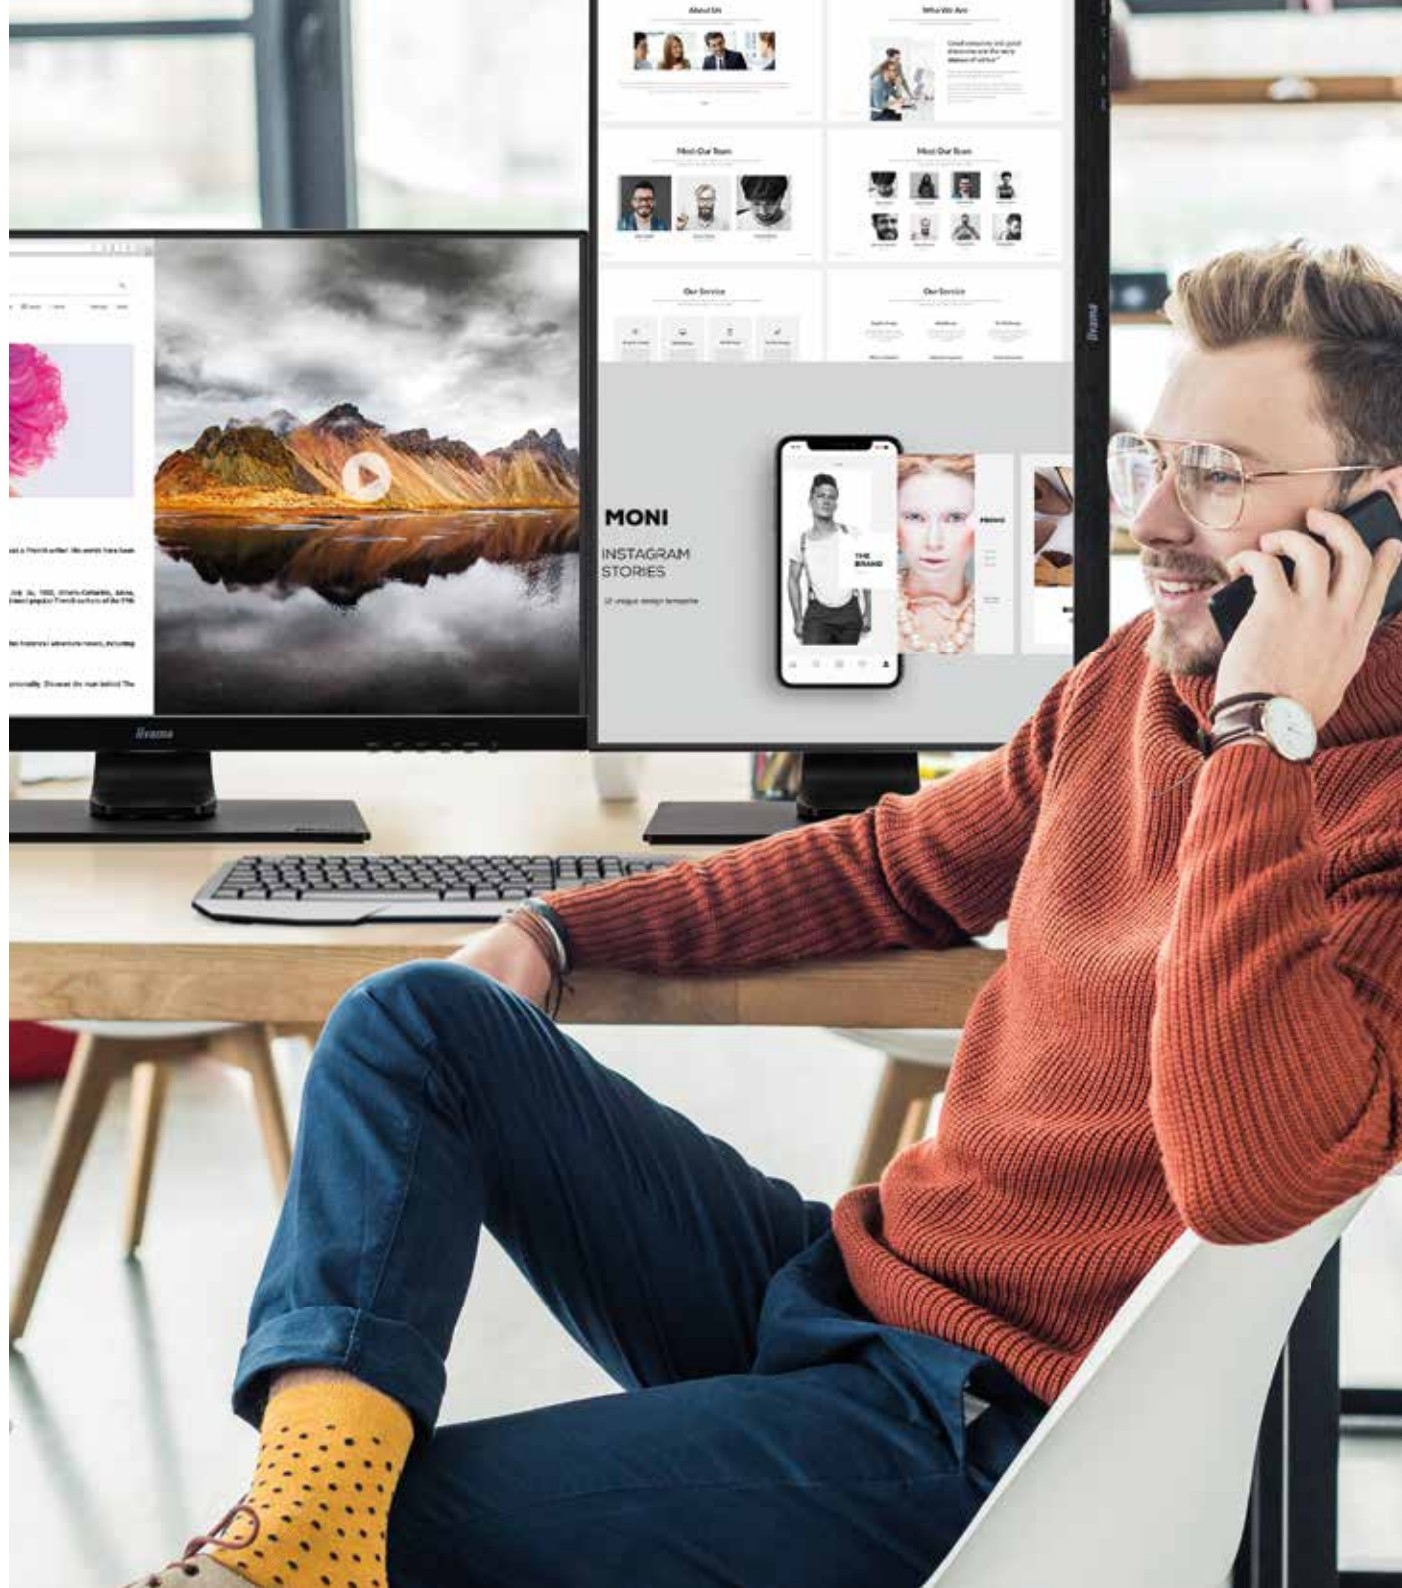



ProLite B1780SD-B1/W1



ProLite B1980D-B1/W1



ProLite B2083HSD-B1



ProLite B2791HSU-B1



ProLite B2791QSU-B1

Display characteristics					
Panel	TN	TN	TN	TN	TN
Size category	17" (43 cm)	19" (48 cm)	19.5" (49.4 cm)	27" (68.6 cm)	27" (68.5 cm)
Native resolution	1280 x 1024	1280 x 1024	1600 x 900	1920 x 1080	2560 x 1440
Response time (ms)	5	5	5	1	1
Contrast typical	1000:1	1000:1	1000:1	1000:1	1000:1
Contrast advanced (ACR)	12 000 000:1	12 000 000:1	12 000 000:1	80 000 000:1	80 000 000:1
Brightness typical (cd / m²)	250	250	250	300	350
Viewing angle (horizontal / vertical)	170° / 160°	170° / 160°	170° / 160°	170° / 160°	170° / 160°
Display colour (mln)	16.7	16.7	16.7	16.7	16.7
Interfaces & connectors					
Input connector	VGA, DVI	VGA, DVI	VGA, DVI	VGA, HDMI, DP	DVI, HDMI, DP
USB HUB	-	-	-	2 outputs (v.2.0)	2 outputs (v.3.0)
Sound					
Speakers / Headphone socket	2 x 1W / -	- / -	2 x 1W / yes	2 x 2W / yes	2 x 2W / yes
Physical specifications					
HAS (mm) / Pivot (°)	130 / 90	130 / 90	130 / 90	130 / 90	130 / 90
Dimensions w x h x d (mm)	370 x 392 (522) x 210	411 x 421.5 (551.5) x 210	469.5 x 348 (478) x 210	613.5 x 397.5 (527.5) x 230	613.5 x 412 (542) x 230
Weight (kg)	4.4	4.9	4.3	6.9	6.6
Cables included	power, DVI, audio	power, DVI	power, DVI, audio	power, HDMI, USB	power, HDMI, DP, USB
Power management / Regulations					
Power usage typical (W)	14	16	15	19	33
Power usage max. in Power Management Mode (W)	0.5	0.5	0.5	0.5	0.5
Power management	VESA DPMS	VESA DPMS, ENERGY STAR®	VESA DPMS	VESA DPMS, ENERGY STAR®	VESA DPMS
Regulations	CE, TÜV-Bauart	CE, TÜV-GS, UKCA	CE, TÜV-GS, VCCI-B, EAC, TCO	CE, TÜV-GS, CU	CE, TÜV-GS, EAC
Design					
Colour, bezel finish, extra	black / white; matt	black / white; matt	black; matt	black; matt	black; matt

X(B)-SERIES MONITORS

The X-series monitors come with top-class features and deliver best-in-class performance. Incorporating the latest IPS or VA technology along with multiple inputs, the displays offer supreme colour performance and optimum compatibility across a broad range of multi-media devices. The X-series monitors are a huge hit with demanding users like photographers, graphic artists and DTP professionals.

VA

VA technology offers higher contrast, darker blacks and much better viewing angles than standard TN technology. The screen will look good no matter what angle you look at it. VA technology is the best choice for almost any professional application.

IPS


IPS displays are best known for wide viewing angles and natural, highly accurate colours. They are especially suited for colour-critical applications.

Inputs (HDMI/DisplayPort)

A wide range of digital video inputs assures compatibility with multiple platforms. The X-series are all provided with multiple inputs including HDMI, DisplayPort and USB-C. They can be used with any laptop, MAC or desktop PC.

USB C dock

The dock allows you to connect your laptop with a single cable to the monitor to both make sure it is charged and connected to a wired network and signal from the laptop is sent to the monitor. A second monitor can be connected to the DisplayPort (MST) output to create a multi-monitor set-up. With additional USB-ports, your mouse, keyboard or webcam can also be connected to the monitor. All thanks to a single cable connecting your laptop to the USB C dock in the monitor.



*functions vary depending on your laptop USB-C support.

KVM Switch

Having a monitor with a KVM switch allows you to share the devices connected via USB to your monitor with two different PC's. Just change the signal input in the OSD menu of the monitor and still using the same keyboard, mouse and webcam, switch from your work laptop to your gaming PC.






ProLite **XU2292HS-B1¹**
XUB2292HS-B1²



ProLite **XU2294HSU-B1**



ProLite **XUB2294HSU-B1/W1**



ProLite **XU2390HS-B1¹**
XUB2390HS-B1²



ProLite **XUB2395WSU-B1**

Display characteristics					
Panel	IPS	VA	VA	IPS	IPS
Size category	21.5" (54.6 cm)	21.5" (54.6 cm)	21.5" (54.6 cm)	23" (58.4 cm)	22.5" (57.2 cm)
Native resolution	1920 x 1080	1920 x 1080	1920 x 1080	1920 x 1080	1920 x 1200
Response time (ms)	4	4	4	4	4
Contrast typical	1000:1	3000:1	3000:1	1000:1	1000:1
Contrast advanced (ACR)	80 000 000:1	80 000 000:1	80 000 000:1	5 000 000:1	5 000 000:1
Brightness typical (cd / m ²)	250	250	250	250	250
Viewing angle (horizontal / vertical)	178° / 178°	178° / 178°	178° / 178°	178° / 178°	178° / 178°
Display colour (mln)	16.7	16.7	16.7	16.7	16.7
Interfaces & connectors					
Input connector	VGA, HDMI, DP	VGA, HDMI, DP	VGA, HDMI, DP	VGI, DVI, HDMI	VGA, HDMI, DP
USB HUB	-	2 outputs (v.2.0)	2 outputs (v.2.0)	-	2 outputs (v.2.0)
Sound					
Speakers / Headphone socket	2 x 1W / yes	2 x 1W / yes	2 x 1W / yes	2 x 2W / yes	2 x 2W / yes
Physical specifications					
HAS (mm) / Pivot (°)	130 / 90 ²	- / -	130 / 90	130 / 90 ²	130 / 90
Dimensions w x h x d (mm)	488.5 x 376 x 187 ¹ 488.5 x 352 (482) x 210 ²	488.5 x 376 x 187	488.5 x 352 (482) x 210	532.5 x 387.5 x 180 ¹ 532.5 x 377.5 (507.5) x 210 ²	499 x 385 (515) x 210
Weight (kg)	3.2 ¹ / 4.8 ²	3	4.7	4 ¹ / 5.3 ²	5.4
Cables included	power, HDMI	power, HDMI, USB	VESA DPMS	power, DVI, audio	power, DP, USB
Power management / Regulations					
Power usage typical (W)	18	19	19	22	24
Power usage max. in Power Management Mode (W)	0.5	0.5	0.5	0.5	0.5
Power management	VESA DPMS	VESA DPMS	VESA DPMS	VESA DPMS	VESA DPMS
Regulations	CE, TÜV-GS, VCCI-B, PSE, EAC, TCO	CE, TÜV-GS, VCCI-B, PSE, EAC, TCO	CE, TÜV-GS, VCCI-B, PSE, EAC, TCO	CE, TÜV-Bauart, VCCI-B, EAC, TCO	CE, TÜV-Bauart, EAC, TCO
Design					
Colour, bezel finish, extra	black; matt	black; matt	black / white; matt	black; matt	black; matt



ProLite X2481HS-B1¹
XB2481HS-B1²

ProLite X2483HSU-B3¹
XB2483HSU-B3²

ProLite XUB2490HSUC-B1

ProLite XUB2492HSU-B1/W1

ProLite XUB2492HSN-B1

Display characteristics					
Panel	VA	VA	IPS	IPS	IPS
Size category	23.6" (60 cm)	23.8" (60.5 cm)	23.8" (60.4 cm)	23.8" (60.5 cm)	23.8" (60.5 cm)
Native resolution	1920 x 1080	1920 x 1080	1920 x 1080	1920 x 1080	1920 x 1080
Response time (ms)	6	4	4	4	4
Contrast typical	3000:1	3000:1	1000:1	1000:1	1000:1
Contrast advanced (ACR)	12 000 000:1	80 000 000:1	80 000 000:1	5 000 000:1	80 000 000:1
Brightness typical (cd / m ²)	250	250	250	250	250
Viewing angle (horizontal / vertical)	178° / 178°	178° / 178°	178° / 178°	178° / 178°	178° / 178°
Display colour (mIn)	16.7	16.7	16.7	16.7	16.7
Interfaces & connectors					
Input connector	VGA, DVI, HDMI	VGA, HDMI, DP	VGA, HDMI, DP	VGA, HDMI, DP	HDMI, DP, USB C dock
USB HUB	-	2 outputs (v.2.0)	1 output (v.2.0)	2 outputs (v.2.0)	2 outputs (v.3.0)
Sound					
Speakers / Headphone socket	2 x 2W / yes	2 x 2W / yes	2 x 2W / yes	2 x 2W / yes	2 x 2W / yes
Physical specifications					
HAS (mm) / Pivot (°)	130 / 90 ²	130 / 90 ²	130 / 90	130 / 90	130 / 90
Dimensions w x h x d (mm)	543.5 x 389 x 213.5 ¹ 543.5 x 397.5 (527.5) x 210 ²	552.5 x 406.5 x 203 ¹ 552.5 x 373 (503) x 210 ²	540 x 405.5 x 210	539.5 x 366.5 (496.5) x 210	539.5 x 366.5 (496.5) x 210
Weight (kg)	3.7 ¹ / 5.4 ²	3.9 ¹ / 5.6 ²	5.1	5.4	5.4
Cables included	power, DVI, audio	power, HDMI, USB	power, USB, HDMI, DP	power, HDMI, DP, USB	power, HDMI, type-C
Power management / Regulations					
Power usage typical (W)	25	26	16	16	19
Power usage max. in Power Management Mode (W)	0.5	0.5	0.5	0.5	0.5
Power management	VESA DPMS	VESA DPMS, ENERGY STAR ^{®2}	VESA DPMS, ENERGY STAR [®]	VESA DPMS	VESA DPMS
Regulations	CE, TÜV-GS, CU	CE, TÜV-GS, VCCI-B, EAC, TCO	CE, VCCI-B, EAC, PSE, UKCA	CE, TÜV-GS, VCCI-B, PSE, EAC, TCO	CE, TÜV-GS, VCCI-B, PSE, EAC, TCO
Design					
Colour, bezel finish, extra	black; matt	black; matt	black; matt	black / white; matt	black; matt



ProLite **XU2493HS-B4¹**
XUB2493HS-B4²



ProLite **XU2493HSU-B1¹**
XUB2493HSU-B1²



ProLite **XUB2493QSU-B1**



ProLite **XUB2495WSU-B3**



ProLite **XUB2496HSU-B1**

Display characteristics					
Panel	IPS	IPS	IPS	IPS	IPS
Size category	23.8" (60.4 cm)	23.8" (60.5 cm)	23.8" (60.5 cm)	24.1" (61.1 cm)	23.8" (60 cm)
Native resolution	1920 x 1080	1920 x 1080	2560 x 1440	1920 x 1200	1920 x 1080
Response time (ms)	4	4	4	5	1
Contrast typical	1000:1	1000:1	1000:1	1000:1	1000:1
Contrast advanced (ACR)		80 000 000:1	80 000 000:1	5 000 000:1	80 000 000:1
Brightness typical (cd / m ²)	250	250	300	300	250
Viewing angle (horizontal / vertical)	178° / 178°	178° / 178°	178° / 178°	178° / 178°	178° / 178°
Display colour (mln)	16.7	16.7	16.7	16.7	16.7
Interfaces & connectors					
Input connector	VGA, HDMI, DP	VGA, HDMI, DP	HDMI, DP	VGA, HDMI, DP	HDMI, DP
USB HUB	- / -	2 outputs (v.2.0)	3 outputs (1 x v.2.0, 2 x v.3.0)	4 outputs (v.2.0)	2 outputs (v.2.0)
Sound					
Speakers / Headphone socket	2 x 2W / yes	2 x 2W / yes	2 x 2W / yes	2 x 2W / yes	2 x 2W / yes
Physical specifications					
HAS (mm) / Pivot (°)	130 / 90	130 / 90 ²	130 / 90	130 / 90	130 / 90
Dimensions w x h x d (mm)	539.5 x 415 x 199.5 ¹ / 539.5 x 373 (503) x 210 ²	539.5 x 415 x 199.5 ¹ / 539.5 x 373 (503) x 210 ²	539.5 x 366 (496) x 210	532 x 387 (517) x 210	539 x 387.5 (517.5) x 256
Weight (kg)	3.5 ¹ / 5.7 ²	3.3 ¹ / 4.8 ²	5.9	5.88	4.7
Cables included	power, HDMI	power, HDMI, USB	power, USB, HDMI, DP	VGA, HDMI, DP	power, HDMI, USB
Power management / Regulations					
Power usage typical (W)	16	19	17	18	17
Power usage max. in Power Management Mode (W)	0.5	0.5	0.5	0.5	0.5
Power management	VESA DPMS, ENERGY STAR®	VESA DPMS, ENERGY STAR®	VESA DPMS, ENERGY STAR®	VESA DPMS, ENERGY STAR®	VESA DPMS, ENERGY STAR®
Regulations	CE, TÜV-Bauart, VCCI-B, EAC, PSE, UKCA	CE, TÜV-Bauart, VCCI-B, PSE, EAC	CE, TÜV-Bauart, EAC, PSE, UKCA	CE, TÜV-Bauart, VCCI-B, PSE, EAC, TCO, UKCA	CE, TÜV-Bauart, VCCI-B, PSE, EAC
Design					
Colour, bezel finish, extra	black; matt	black; matt	black; matt	black; matt	black; matt

ProLite **XUB2595WSU-B1**ProLite **XU2792HSU-B1**ProLite **XUB2792HSU-B1/W1**ProLite **XUB2792HSC-B1**ProLite **XUB2792HSN-B1**

Display characteristics					
Panel	IPS	IPS	IPS	IPS	IPS
Size category	25" (63.4 cm)	27" (68.6 cm)	27" (68.6 cm)	27" (68.6 cm)	27" (68.6 cm)
Native resolution	1920 x 1200	1920 x 1080	1920 x 1080	1920 x 1080	1920 x 1080
Response time (ms)	4	4	4	4	4
Contrast typical	1000:1	1000:1	1000:1	1000:1	1000:1
Contrast advanced (ACR)	5 000 000:1	80 000 000:1	80 000 000:1	80 000 000:1	80 000 000:1
Brightness typical (cd / m²)	300	250	250	250	250
Viewing angle (horizontal / vertical)	178° / 178°	178° / 178°	178° / 178°	178° / 178°	178° / 178°
Display colour (mIn)	16.7	16.7	16.7	16.7	16.7
Interfaces & connectors					
Input connector	VGA, HDMI, DP	VGA, HDMI, DP	VGA, HDMI, DP	HDMI, Display Port, USB-C	HDMI, Display Port, USB-C dock
USB HUB	2 outputs (v.2.0)	2 outputs (v. 2.0)	2 outputs (v.2.0)	2 outputs (v.3.0)	2 outputs (v.3.0)
Sound					
Speakers / Headphone socket	2 x 2W / yes	2 x 2W / yes	2 x 2W / yes	2 x 2W / yes	2 x 2W / yes
Physical specifications					
HAS (mm) / Pivot (°)	130 / 90	- / -	130 / 90	130 / 90	130 / 90
Dimensions w x h x d (mm)	546.5 x 399 (529) x 210	612 x 435 x 197	612 x 397 (527) x 230	612 x 411.5 (541.5) x 230	612 x 411.5 (541.5) x 230
Weight (kg)	5.2	5.1	6.8	6.8	6.8
Cables included	power, DP, USB	power, HDMI, USB	power, USB, HDMI	power, USB-C, HDMI	power, USB-C, HDMI
Power management / Regulations					
Power usage typical (W)	28	16.5	16.5	19	19
Power usage max. in Power Management Mode (W)	0.5	0.5	0.5	0.5	0.5
Power management	VESA DPMS	VESA DPMS, ENERGY STAR®	VESA DPMS, ENERGY STAR®	VESA DPMS	VESA DPMS
Regulations	CE, TÜV-Bauart, EAC, TCO	CE, TÜV-GS, EAC, TCO	CE, TÜV-GS, EAC, TCO, EPEAT	CE, TÜV-GS, VCCI-B, PSE, EAC, TCO, UKCA	CE, TÜV-GS, VCCI-B, PSE, EAC, TCO, UKCA
Design					
Colour, bezel finish, extra	black; matt	black; matt	black / white; matt	black; matt	black; matt



ProLite **XU2792QSU-B1**



ProLite **XUB2792QSU-B1/W1**



ProLite **XUB2792QSN-B1**



ProLite **XU2792UHSU-B1¹**
XUB2792UHSU-B1²



ProLite **XU2793HS-B4¹**
XUB2793HS-B4²



ProLite **XU2793HSU-B4¹**
XUB2793HSU-B4²

IPS	IPS	IPS	IPS	IPS	IPS
27" (68.5 cm)	27" (68.5 cm)	27" (68.5 cm)	27" (68.4 cm)	27" (68.5 cm)	27" (68.5 cm)
2560 x 1440	2560 x 1440	2560 x 1440	3840 x 2160	1920 x 1080	1920 x 1080
5	5	4	4	4	4
1000:1	1000:1	1000:1	1000:1	1000:1	1000:1
80 000 000:1	80 000 000:1	80 000 000:1	80 000 000:1	80 000 000:1	80 000 000:1
350	350	350	300	300	300
178° / 178°	178° / 178°	178° / 178°	178° / 178°	178° / 178°	178° / 178°
1.07B	1.07B	1.07B	1.07B	16.7	16.7
DVI, HDMI, DP	DVI, HDMI, DP	HDMI, DP, USB-C dock	DVI, HDMI, DP	VGA, HDMI, DP	VGA, HDMI, DP
2 outputs (v.3.0)	2 outputs (v.3.0)	2 outputs (v.3.0)	2 outputs (v.3.0)	- / -	2 outputs (v.3.0)
2 x 2W / yes	2 x 2W / yes	2 x 2W / yes	2 x 2W / yes	2 x 2W / yes	2 x 2W / yes
- / -	130 / 90	130 / 90	130 / 90 ²	130 / 90 ²	130 / 90 ²
611 x 441.5 x 197	611 x 413 (543) x 230	611 x 413 x 543	613.5 x 440.5 x 197 ¹ 613.5 x 412 (542) x 230 ²	612 x 479.5 x 236 ¹ 612 x 416 (546) x 230 ²	612 x 479.5 x 236 ¹ 612 x 416 (546) x 230 ²
5	7.7	7.8	4.6' / 7.2 ²	4.5' / 6.7 ²	4.6' / 6.8 ²
power, HDMI, DP, USB	power, HDMI, DP, USB	power, HDMI, DP, USB-C	power, HDMI, DP, USB	power, HDMI	power, HDMI, USB
33	33	33	35	19	19
0.5	0.5	0.5	0.5	0.5	0.5
ESA DPMS	VESA DPMS	VESA DPMS	VESA DPMS	VESA DPMS	VESA DPMS
CE, TÜV-GS, EAC, TCO	CE, TÜV-GS, EAC, TCO	CE, TÜV-GS, VCCI-B, EAC, PSE, TCO, UKCA	CE, TÜV-GS, VCCI-B, PSE, EAC, TCO	CE, TÜV-GS, VCCI-B, PSE, EAC, UKCA	CE, TÜV-Bauart, VCCI-B, PSE, EAC
black; matt	black / white; matt	black; matt	black; matt	black; matt	black; matt



ProLite XUB2796HSU-B1



ProLite XUB2796QSU-B1



ProLite XUB2893UHSU-B1



ProLite XB3270QS-B1



ProLite XB3288UHSU-B1

Display characteristics					
Panel	IPS	IPS	IPS	IPS	VA
Size category	27" (68.6)	27" (68.5 cm)	28", (71cm)	31.5" (80 cm)	31.5" (80 cm)
Native resolution	1920 x 1080	2560 x 1440	3840 x 2160	2560 x 1440	3840 x 2160
Response time (ms)	1	1	3	4	3
Contrast typical	1000:1	1000:1	1000:1	1200:1	3000:1
Contrast advanced (ACR)	80 000 000:1	80 000 000:1	80 000 000:1	80 000 000:1	80 000 000:1
Brightness typical (cd / m²)	250	250	300	250	300
Viewing angle (horizontal / vertical)	178° / 178°	178° / 178°	178° / 178°	178° / 178°	178° / 178°
Display colour (mln)	16.7	16.7	1.07B 10 bit	1.07B	1.07B
Interfaces & connectors					
Input connector	HDMI, DP	HDMI, DP	HDMI, DP	DVI, HDMI, DP	HDMI, DP
USB HUB	2 outputs (v.2.0)	2 outputs (v.2.0)	4 outputs (2 x v.2.0, 2 x v. 3.0)	-	2 outputs (v.3.0)
Sound					
Speakers / Headphone socket	2 x 2W / yes	2 x 2W / yes	2 x 2W / yes	2 x 3W / yes	2 x 3W / yes
Physical specifications					
HAS (mm) / Pivot (°)	130 / 90	130 / 90	130 / 90	100 / -	130 / -
Dimensions w x h x d (mm)	610 x 413.5 (543.5) x 256	611.5 x 414.5 (544.5) x 256	636.5 x 414 (544) x 230	726 x 453 (553) x 230	730 x 458.5 (578.5) x 230
Weight (kg)	5.4	5.4	7.6	8.6	8.9
Cables included	power, HDMI, USB	power, HDMI, USB	power, USB, HDMI, DP	power, HDMI, DP	power, HDMI, DP, USB
Power management / Regulations					
Power usage typical (W)	19	23	39.5	39	47
Power usage max. in Power Management Mode (W)	0.5	0.5	0.5	0.5	0.5
Power management	VESA DPMS, ENERGY STAR®	VESA DPMS, ENERGY STAR®	VESA DPMS, ENERGY STAR®	VESA DPMS	VESA DPMS
Regulations	CE, TÜV-Bauart, VCCI-B, PSE, EAC	CE, TÜV-Bauart, VCCI-B, PSE, EAC	CE, TÜV-Bauart, VCCI-B, PSE, EAC, UKCA	CE, TÜV-Bauart, VCCI-B, PSE, EAC	CE, TÜV-Bauart, VCCI-B, PSE, EAC
Design					
Colour, bezel finish, extra	black; matt	black; matt	black; matt	black; matt	black; matt



ProLite X3291HS-B1



ProLite XUB3293UHSN-B1



ProLite XUB3493WQSU-B1



ProLite XCB3494WQSN-B1



ProLite X4373UHSU-B1

Display characteristics					
Panel	IPS	IPS	IPS	VA	VA
Size category	31.5" (80.1 cm)	31.5" (80 cm)	34" (86.7 cm)	34" (86.4cm)	42.5" (108cm)
Native resolution	1920 x 1080	3840 x 2160	3440 x 1440	3440 x 1440	3840 x 2160
Response time (ms)	5	4	4	0.4 MPRT	3
Contrast typical	1000:1	1000:1	1000:1	3000:1	4000:1
Contrast advanced (ACR)	12 000 000:1	80 000 000:1	80 000 000:1	80 000 000:1	80 000 000:1
Brightness typical (cd / m²)	250	350	400	300	400
Viewing angle (horizontal / vertical)	178° / 178°	178° / 178°	178° / 178°	178° / 178°	178° / 178°
Display colour (mIn)	16.7	1.07	16.7	16.7	1.07B
Interfaces & connectors					
Input connector	VGA, DVI, HDMI	HDMI, Display Port, USB-C dock	2 x HDMI, DP	HDMI, Display Port, USB-C dock	HDMI, DP, mDP
USB HUB	-	2 outputs (v. 3.0)	2 outputs (v.3.0)	3 outputs (v. 3.0)	4 outputs (2 x v.2.0, 2 x v.3.0)
Sound					
Speakers / Headphone socket	2 x 3W / yes	2 x 3W / yes	2 x 5W / yes	2 x 2W / yes	2 x 7W / yes
Physical specifications					
HAS (mm) / Pivot (°)	- / -	130 / -	130 / -	130 / -	- / -
Dimensions w x h x d (mm)	737.5 x 523.5 x 240		817 x 415 (545) x 230	809.5 x 425 (555) x 275	977.5 x 621.5 x 251
Weight (kg)	7	10	9.5	8.7	14.5
Cables included	power, DVI, audio	power, USB, USB-C, HDMI, Display Port	power, HDMI, DP, USB	power, USB, USB-C, HDMI, Display Port	power, USB, HDMI, DP
Power management / Regulations					
Power usage typical (W)	36	59	43	56	92
Power usage max. in Power Management Mode (W)	0.5	0.5	0.5	0.5	0.5
Power management	VESA DPMS	VESA DPMS	VESA DPMS, ENERGY STAR®	VESA DPMS	VESA DPMS
Regulations	CE, TÜV-Bauart, VCCI-B, PSE	CE, TÜV-Bauart, VCCI-B, PSE, EAC, UKCA	CE, TÜV-Bauart, VCCI-B, PSE, EAC	CE, TÜV-Bauart, VCCI-B, PSE, EAC, UKCA	CE, TÜV-Bauart, VCCI-B, PSE, EAC, UKCA
Design					
Colour, bezel finish, extra	black; matt	black; matt	black; matt	black; matt	black; matt

UNIFIED COMMUNICATION

Both at home and in the office, the UC CAM75FS **compact Full HD webcam** ensures you can enjoy all the benefits of video meetings. The integrated two microphone array detects audio from up to 4 metres away delivering high quality sound with no annoying background noise or distortion.

It supports all the leading conferencing software like **Zoom**, **Skype**, **Microsoft Teams**, and the simple yet effective privacy shutter guarantees the camera can only see you when you want it to. like photographers, graphic artists and DTP professionals.

- **2D & 3D Digital Noise Reduction**

- **Easy set up**

Seamless connection via a USB cable. The webcam is instantly operational after connection.

- **Compatibility**

Compatible with any conferencing software like e.g. Zoom, Skype, Microsoft Teams and others.



Want to know more, please scan the QR code:





To know more about iiyama monitors featuring the KVM switch please check :



32" XUB3293UHSN



34" XCB3494WQSN



For iiyama models featuring USB-C dock please follow the QR code :



For more on the USB-C dock monitors, please visit our YouTube channel:



KVM : switch easily between two PCs

The KVM switch allows users to share the peripheral devices (keyboard/mouse/webcam) connected via USB to their monitor with two different PCs.

Simply change the signal input in the monitor's OSD menu, and your keyboard, mouse and webcam will switch from, for example, your work laptop to your gaming PC. The switch simplifies cable management and saves a significant amount of desk space and time. For example if you are a graphic designer or videographer, you are able to switch to a second PC and watch your favourite show or work on a different project while the other PC is busy rendering a file. All of this without having to leave your seat or unplug anything!

USB-C Dock : how does it work ?

The dock allows you to connect your laptop with a single cable to the monitor to make sure it is both charged and connected to a wired network whilst signal from the laptop is sent to the monitor.

A second monitor can be connected to the DisplayPort (MST) output to create a multi-monitor set-up. Using additional USB-ports in the monitor, your mouse, keyboard or webcam can also be connected to the laptop. All thanks to a single cable connecting your laptop* to the USB-C dock in the monitor.

*Functions vary depending on your laptop USB-C support.

QUICK GUIDE TO THE MOST IMPORTANT SERIES


Not all models included, for full line-up please check the complete catalogue

Series	70	73	81	80	83	88	90 ¹ /95 ²	91	92	92N	93	94	96
Matrix	IPS	VA	VA	TN	TN, VA	VA	IPS	TN, IPS	IPS	IPS	IPS	VA	IPS
Size	32"	43"	24"	17", 19"	TN: 20", 24" VA: 20", 24"	32"	23", 24", 25" ^{1,2}	TN: 27" IPS: 32"	22", 24", 27"	24", 27"	24", 27", 28", 32", 34"	22", 34"	24", 27"
Resolution	2560 x 1440	3840 x 2160	1920 x 1080	1280 x 1024	20": 1600 x 900 24": 1920 x 1080	3840 x 2160	1920 x 1080	27", 32": 1920 x 1080 27": 2560 x 1440	22", 24", 27": 1920 x 1080 27": 2560 x 1440 27": 3840 x 2160	24": 1920 x 1080 27": 2560 x 1440	24", 27": 1920 x 1080 24": 2560 x 1440 28", 32": 3840 x 2160 34": 3440 x 1440	22": 1920 x 1080 34": 3440 x 1440	24", 27": 1920 x 1080 27": 2560 x 1440
Fixed stand	-	43"	24"	17", 19"	20", 24"	-	23"	27", 32"	22", 24", 27"	-	24", 27", 34"	22", 34"	-
Height adjustable stand (HAS)	32"	-	24"	17", 19"	20", 24"	32"	23", 24", 25"	27"	22", 24", 27"	24", 27"	24", 27", 28", 34"	22"	-
Design	slim bezel	bezel	slim bezel	bezel	bezel	slim bezel	3-side bezel-free	27": 3-side bezel-free 32": 3-side bezel-free	3-side bezel-free	3-side bezel-free	3-side bezel-free	3-side bezel-free	3-side bezel-free
Available in white ¹ in addition to black	-	-	-	17", 19"	-	-	-	-	24", 27"	-	-	22"	-
Extra	-	-	-	-	-	-	24" ¹ : webcam	-	-	USB-C dock LAN/DP-OUT	32": USB-C dock, LAN, KVM	34": curved panel, USB-C dock, LAN, KVM	-

¹ all white models available with HAS only

SCREEN RESOLUTION

The screen resolution is the number of distinct pixels that can be displayed in width and height. The higher resolution, the more information can be accommodated on the screen.

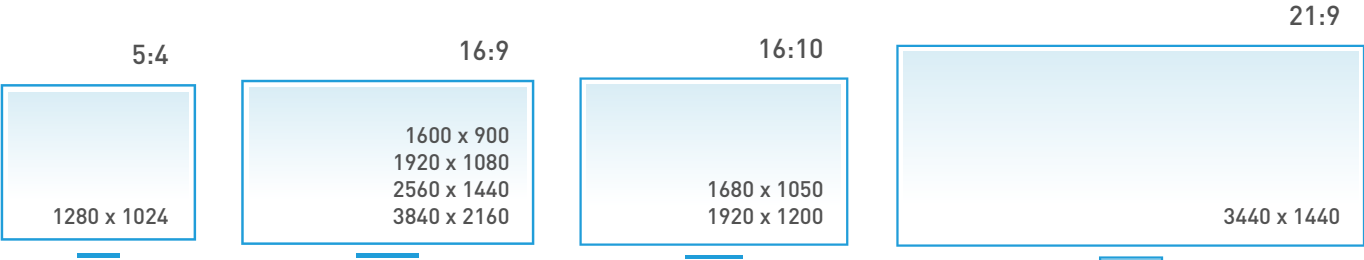

LEGEND

 4K resolution	 Slim Line	 Picture-In-Picture	 Webcam
 WQHD resolution	 FreeSync	 Picture-By-Picture	 HAS (Height adjustable)
 QHD	 24 bit	 Protective glass	 PIVOT (screen rotation)
 Full HD	 95% NTSC	 Speakers	 USB HUB
 Flicker free LED (DC dimming)	 X-Res Technology	 Headphone socket/ Audio Out	 USB C dock
		 KVM switch	 USB-C

EPEAT® - EPEAT is a comprehensive environmental rating that helps identify greener computers and other electronic equipment. The Bronze certification means the monitor meets all required criteria. EPEAT Bronze is valid in countries where iiyama registers the product. Please visit www.epeat.net for the registration status in your country.

All trademarks and registered trademarks acknowledged. Changes and mistakes in graphics and specs reserved. Specifications subject to change without notice. Copyright by iiyama International. Stand 06/2022.



DESKTOP



TOUCHSCREEN



(i)LFD



GAMING

iiyama

iiyama
professional displays

G-MASTER™
#MONITORS4GAMERS
by iiyama

When we say iiyama, we're proud because iiyama ultimately means over 25 million of different stories. Your stories of connecting with the world.

Based in Japan, iiyama is a leading international display solutions manufacturer enabling individuals and organizations to interact with the world around them since 1973. iiyama desktop monitors accompany people at work and at home. iiyama Large Format Displays and touchscreen solutions help businesses get their message across to their partners and clients. And the iiyama G-Master #monitors4gamers aid gamers to unlock their full gaming potential.

Contact details:

iiyama International

Wijkmeestraat 8
2131 HA Hoofddorp
The Netherlands

info@iiyama.com
www.iiyama.com

